

Column

300, 500 Litres

Art. No. COL500GNK
Art. No. COL500GYK
Art. No. COL500CHK
Art. No. SP08319K
Art. No. SP08321K
Art. No. SP08324K

Connection points

Pre-marked filter/diverter
connection points (3.No)

Tap connector at $\frac{3}{4}$ ",
 $\frac{3}{4}$ " plastic tap is supplied.

Tank Inter-linking/
Pump Connection
point at $\frac{3}{4}$ "

Accessories

3P Accessories suitable for this product include :

3P Filter Collector with Universal Fitting Kit (Art. No. 2000840U)

3P Garden Steelpump

with hoesail reducer and carrying handle (Art. No. X-AJE80PRH)

3P 1" Pump to $\frac{3}{4}$ " Tank Connection Kit (Art. No. 9000123PT)

3P $\frac{3}{4}$ " Tank to Tank Connection Set (Art. No. 9000326)

Column

300, 500 Litres

Art. No. COL500GNK
Art. No. COL500GYK
Art. No. COL500CHK
Art. No. SP08319K
Art. No. SP08321K
Art. No. SP08324K

Instructions

To fill the Column, we recommend using the optional 3P Filter Collector Universal.

Where the water butt cannot be located within 30 cm of the down pipe, longer Universal Long Link Kits are available online (Art. No. 9000123U to U5).



If in any doubt during installation, please consult a professional tradesperson.



Column


300, 500 Litres

Art. No. COL500GNK
Art. No. COL500GYK
Art. No. COL500CHK
Art. No. SP08319K
Art. No. SP08321K
Art. No. SP08324K

Column

300, 500 Litres

Art. No. COL500GNK
Art. No. COL500GYK
Art. No. COL500CHK
Art. No. SP08319K
Art. No. SP08321K
Art. No. SP08324K

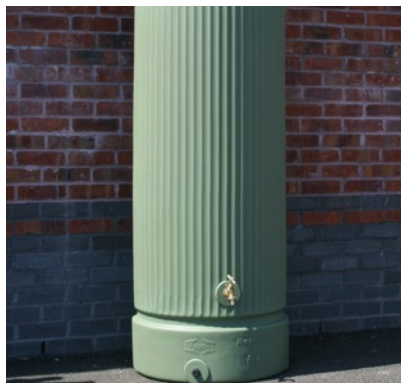

1. Setting Up

The Water Column must be situated on firm and level ground.

You will need to position the tank near a downpipe and connect to the downpipe using your Filter Collector Universal or similar rainwater diverter.

*** Top Tip!** Before filling with water, check the drain-down point is fully tightened. It may just need a ¼ turn. A 2p or 50p piece is the perfect tool if you don't have the right sized screwdriver.



4. Connecting tanks

Tanks can be linked together using a connection set, we recommend the 3P ¾" tank-to-tank connector (250 mm). Each additional tank needs an 8 mm air vent drilled in the lid to ensure they fill correctly.

Isolation valves can also be used if necessary.



2. Attaching the tap

The Water Column comes with a 3/4 inch brass tap. The tap can be screwed into the 3/4" brass threaded tap connector which is at a convenient height for filling a watering can.

Use a little PTFE tape to help seal the tap in its vertical position.



5. Connecting a pump

A pump can be attached to the Column with appropriate 3P connector sets. 3P recommend the automatic Garden Steelpump (ref. XAJE80B). Consult your 3P dealer for further details.



3. Filling with rainwater

The Column can be filled using various rainwater diverters, although we recommend filling your Column only with filtered rainwater. The 3P Filter Collector Universal is ideal for this purpose.

There are three pre-marked filling points around the top of the tank which can be cut to the required size to fit your Filter/Diverter. Always refer to the instructions supplied with your Filter/Diverter during installation.



6. Attaching the lid

The 500 L Column has a removable lid, whereas the 300 L Column has a push-fit lid.

7. Winter Care Precautions

During extremely cold winters, where daytime temperatures are below zero for several days, it is wise to ensure that the tank is only about 2/3rd's full and the water supply turned off. This will prevent the frozen water from expanding and damaging the tank.

